1.5 inch ESC Skimmer / Sediment Pond Surface Drain

NTS TYPICAL DRAWING

Draw down Chart	
24 hour draw down	1801 cf
48 hour draw down	3602 cf
72 hour draw down	5403 cf

1. Solid barrel pipe included.
2. Union separates for installation of provided orifice.
3. Flex hose provided with customer specified outlet structure connection.
4. Skimmer / Surface drain. cubic feet per day.
5. Orifice included, as specified by customer.
6. Drain and vents fully enclosed by frame.
7. Shipped assembled. Customer attaches to structure.

Side View
NTS TYPICAL

All ESC Skimmers are designed to sit on a 3X3 rip rap pad.

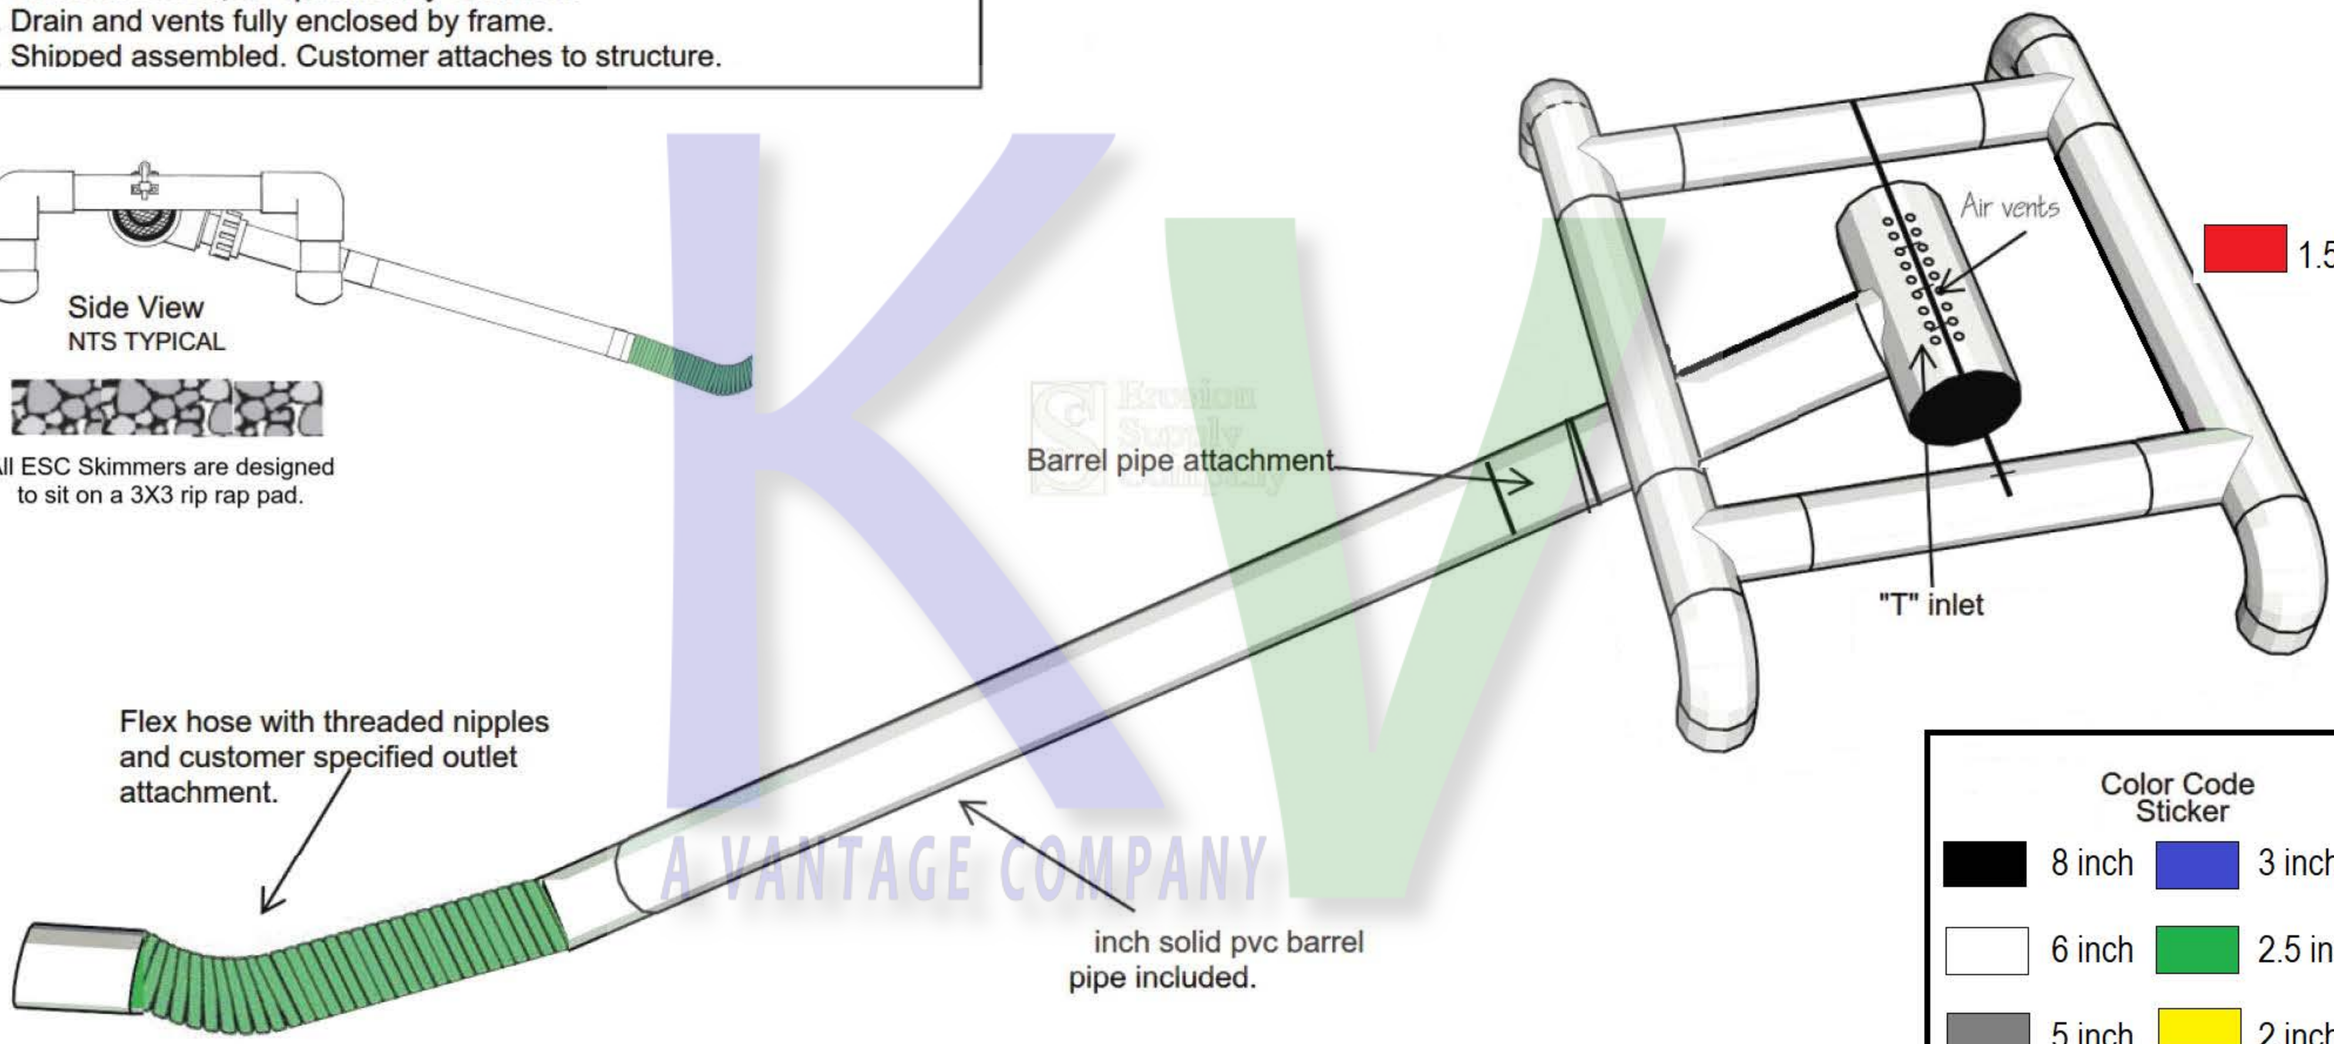

Color Code Sticker

8 inch		3 inch	
6 inch		2.5 inch	
5 inch		2 inch	
4 inch		1.5 inch	

A VANTAGE COMPANY

1-24-2018 (updated)

Erosion Supply Company
www.escskimmer.com