


2 inch ESC Skimmer / Sediment Pond Surface Drain

NTS TYPICAL DRAWING

Draw down Chart	
24 hour draw down	4019 cf
48 hour draw down	8038 cf
72 hour draw down	12057 cf

1. Solid barrel pipe included.
2. Union separates for installation of provided orifice.
3. Flex hose provided with customer specified outlet structure connection.
4. Skimmer / Surface drain. cubic feet per day.
5. Orifice included, as specified by customer.
6. Drain and vents fully enclosed by frame.
7. Shipped assembled. Customer attaches to structure.

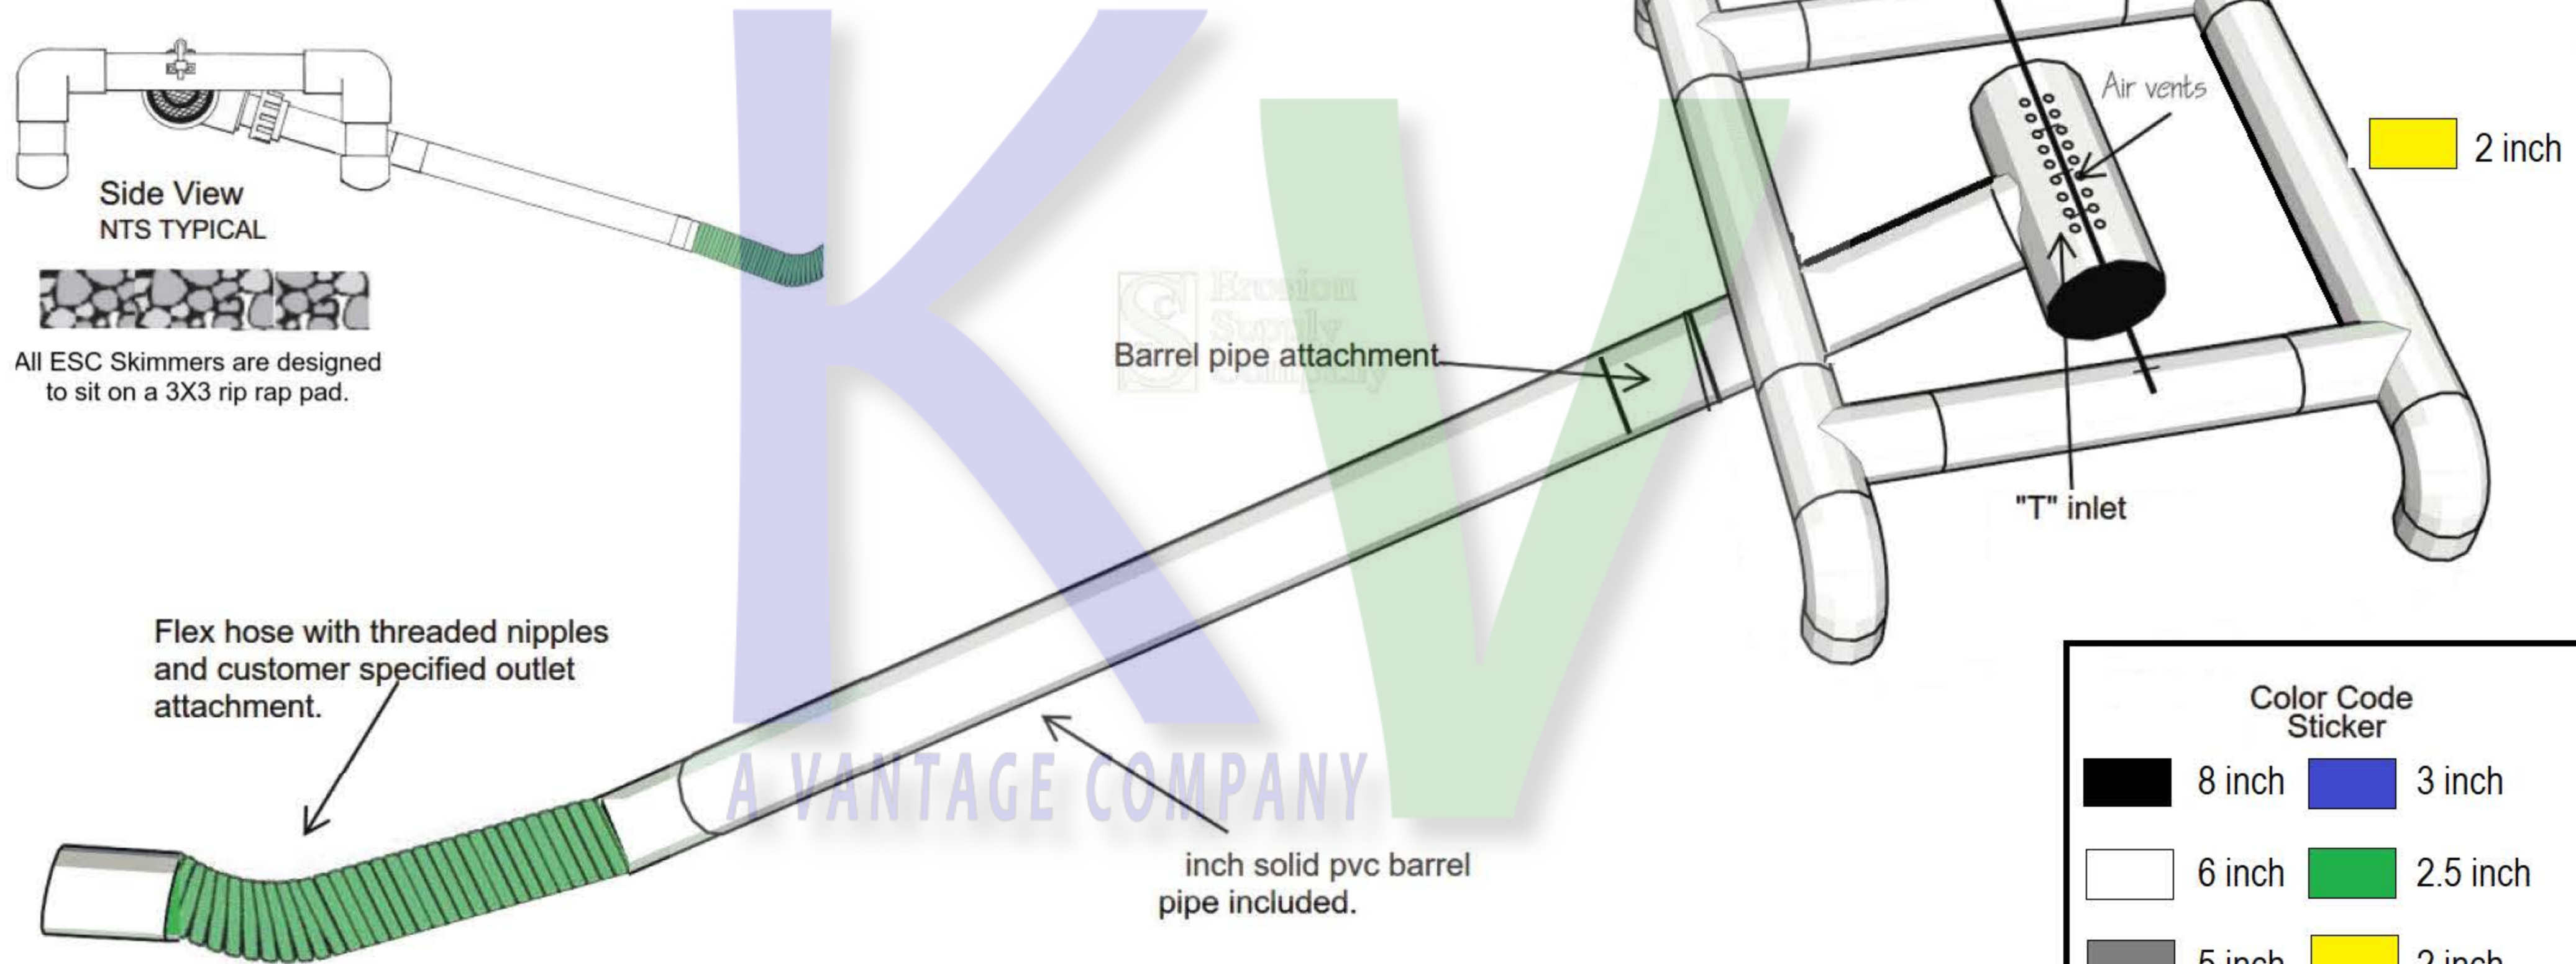

Color Code Sticker			
8 inch	3 inch		
6 inch	2.5 inch		
5 inch	2 inch		
4 inch	1.5 inch		