


4 inch ESC Skimmer / Sediment Pond Surface Drain

NTS TYPICAL DRAWING

1. Solid barrel pipe included.
2. Union separates for installation of provided orifice.
3. Flex hose provided with customer specified outlet structure connection.
4. Skimmer / Surface drain. cubic feet per day.
5. Orifice included, as specified by customer.
6. Drain and vents fully enclosed by frame.
7. Shipped assembled. Customer attaches to structure.

Draw down Chart	
24 hour draw down	16758 cf
48 hour draw down	35516 cf
72 hour draw down	50274 cf

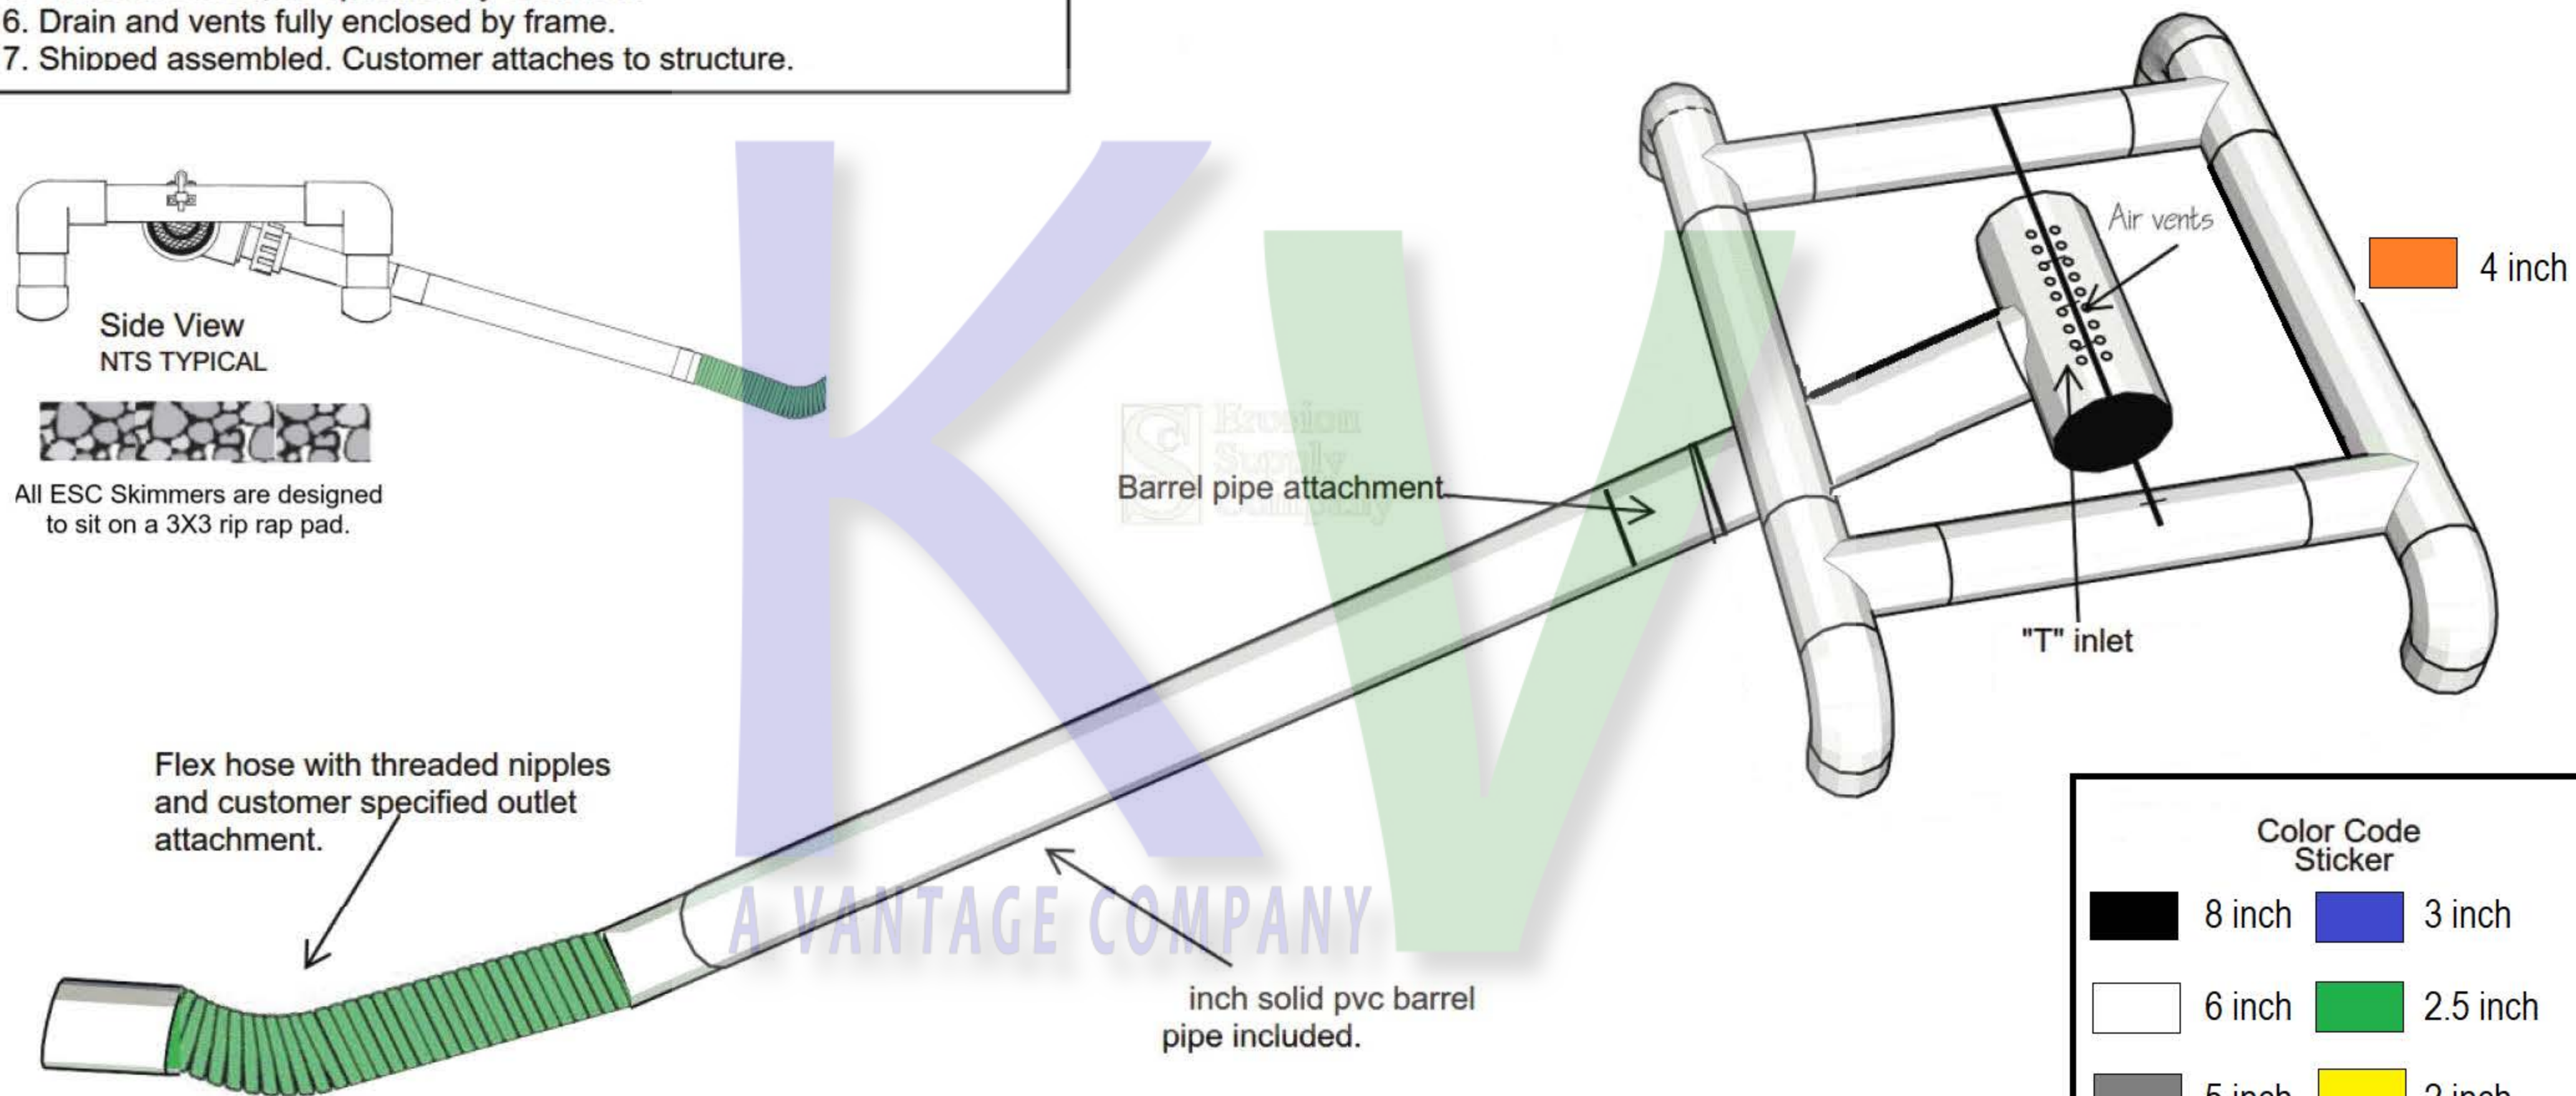

Color Code Sticker			
Black	8 inch	Blue	3 inch
White	6 inch	Green	2.5 inch
Grey	5 inch	Yellow	2 inch
Orange	4 inch	Red	1.5 inch